
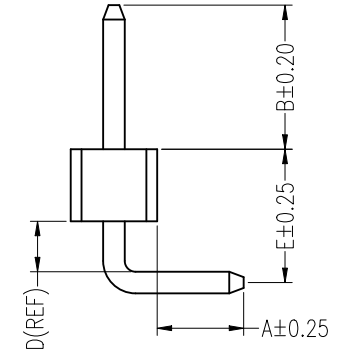
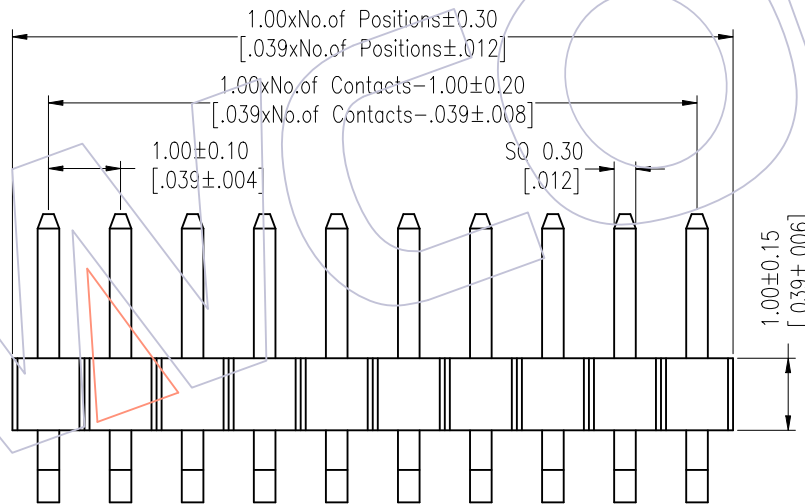
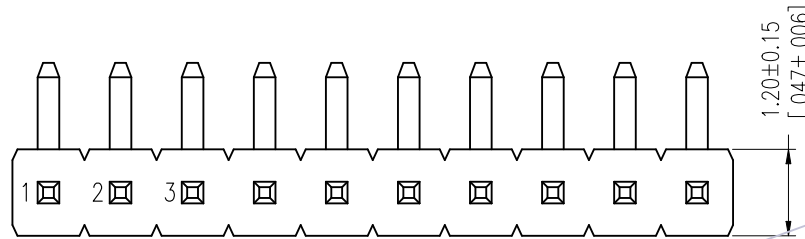


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
Rated Current:0.75AMP.  
Contact Resistance:30mΩ Max.  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min.  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au Over Ni  
Insulator Material:PA9T+33%G.F UL94V-0 BK

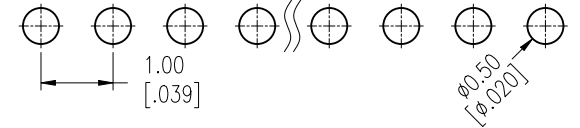

## Ordering Information

1510-11 XX XX R 055 C A XX

No. of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
01~50	G0=Gold Flash	L=A+B+D+1.6	C=PA9T	A=Tray	01~99
	G3=10u"Gold	Standard:055=5.5			
	G4=15u"Gold				
	G5=30u"Gold				
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A	E	B
Standard	5.5	1.20	1.85	2.00
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	-----	X.X ±0.40	William Chen	2018/01/05	UNIT	mm [inch]	1510-11XXXXRXXXCXXX
A1	2012/11/20	Modify the material	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, SINGLE ROW, R/A, H=1.0
A0	2012/03/01	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

**WCON**  
Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
-------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------