


HSF



NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

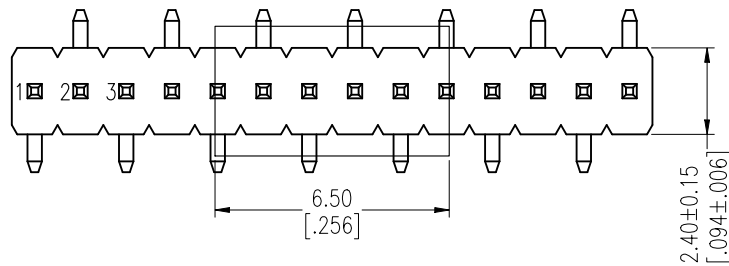

TYPE-1

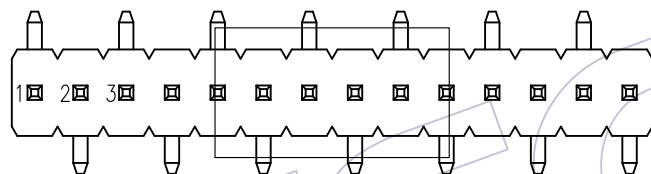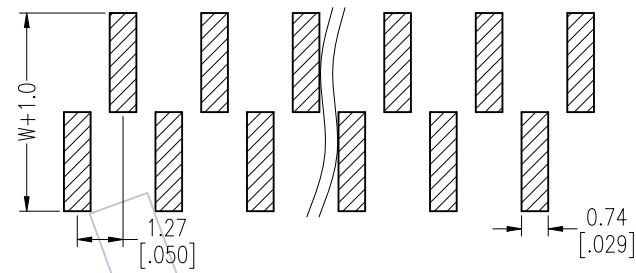



TYPE-2

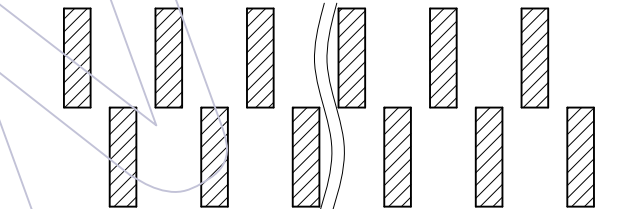

Ordering Information

1315-11 XX XX M XXX C R XX

No. of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02~50	G0=Gold Flash	L=B+D+1.5+ $\frac{W}{2}$	C=PA9T	A=Tray	01~99
	G3=10u"Gold	Std:057=5.7		T=Tube	
	G4=15u"Gold	068=6.8		P=Tube+CAP	
	G5=30u"Gold	078=7.8		R=Tape&Reel+CAP	
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

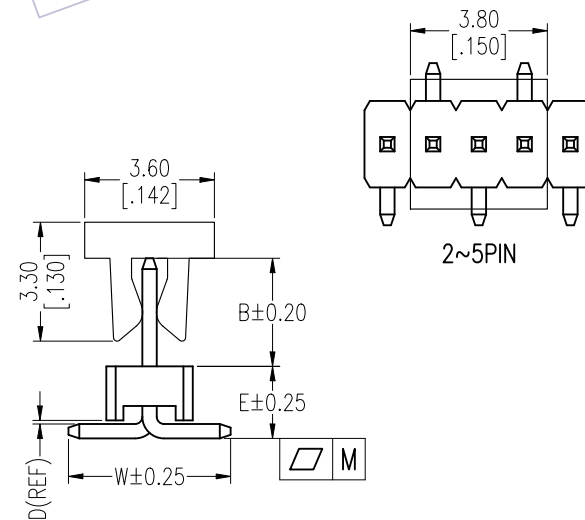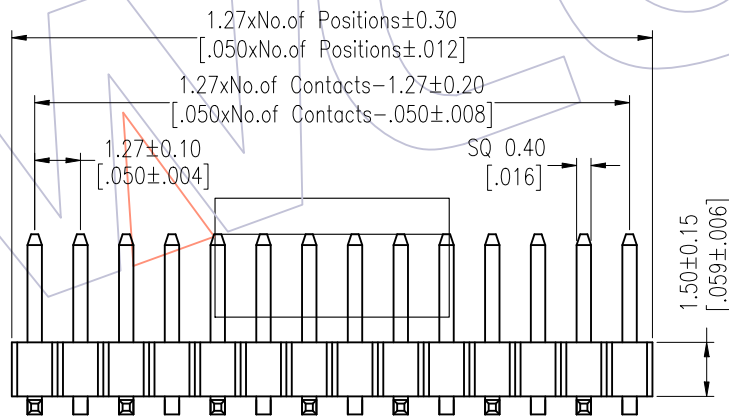

2~5PIN

Item	Pin Length	W	E	B	Mating
Standard	5.7	4.50	2.00	1.90	2321
	6.8	4.50	2.00	3.00	2334
	7.8	4.50	2.00	4.00	2344
Alternate					

PIN(PerRow)	2-15P	16-30P	31-50P	⚠
M	0.10	0.15	0.20	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2023/02/01	Add Flatness	⚠	Du Ying	X.X ±0.40	2023/02/01	UNIT	mm [inch]	1315-11XXXXMXXXCXXX ⚠
A1	2018/01/15	MODIFY PART NO.	⚠	William Chen	X.XX ±0.25	DATE	SIZE	A4	TITLE: 1.27 Pin Header, SINGLE ROW, SMT, H=1.5
A0	2012/03/15	NEW	-----	-----	X.XXX ±0.15	DATE	SHEET	1/1	Customer NO.
					Angle ± 3'	DATE	PROJ.	⚠	
					DIM TOL				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--