
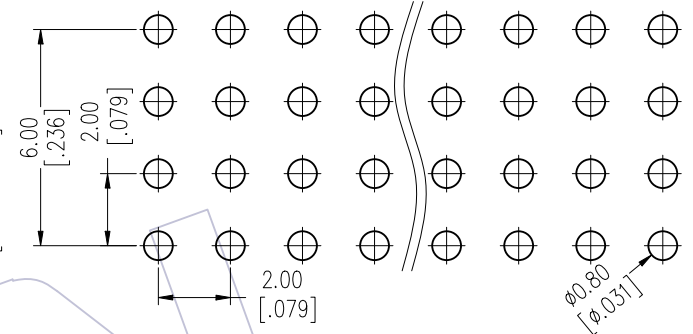


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)



NOTES:  
 Rated Current: 2.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40°C to +125°C(GOLD)  
 -40°C to +105°C(TIN)  $\Delta 2$   
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0 BK

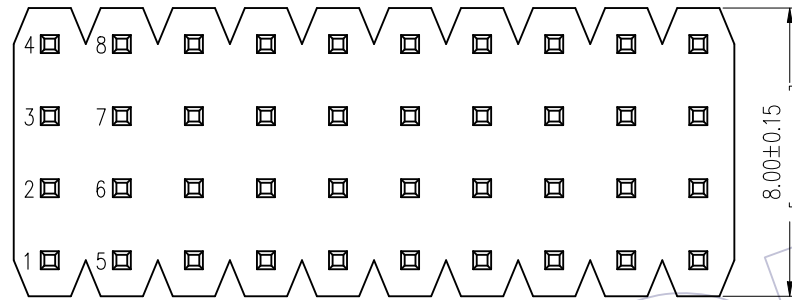

## Ordering Information

1215-14 XX XX S XXX C 0 XX  $\Delta 1$

$\Delta 3$  No. of Pins Contact Plating Pin Length Insulator Packing Series No.  
 Per Row: 04-40 G0=Gold Flash L=A+B+1.5 Material 0=PE Bag 01-99  
 G3=10u"Gold Standard: 083=8.3 C=PA9T T=Tube  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

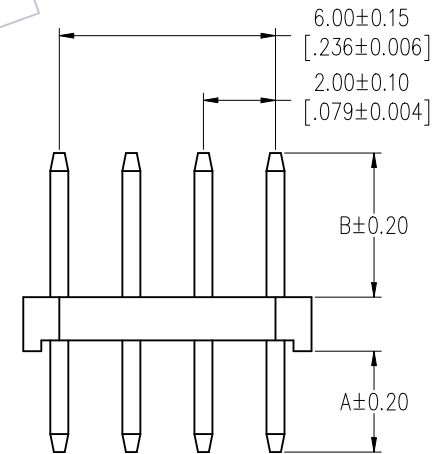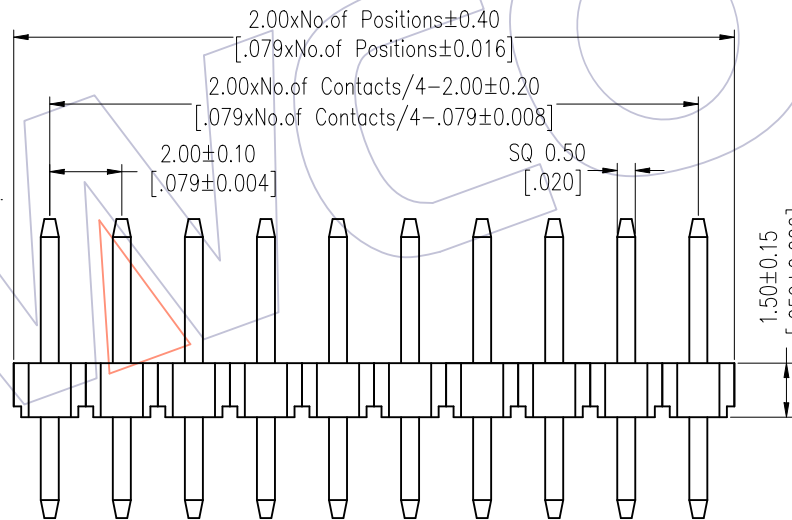

Item	Pin Length	A	B	Mating
Standard	8.30	2.80	4.00	2263
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/11	Modify Pin 04~40P	$\Delta 3$	Drawing	OPERATION	2020/06/11	UNIT	mm	1215-14XXXXSXXXCOXX $\Delta 1$
A2	2019/02/28	Modify	$\Delta 2$	Dwg	X.X ±0.40	DATE	SIZE	A4	TITLE:
A1	2018/01/18	Modify P/N	$\Delta 1$	-----	X.XX ±0.25	DATE	SHEET	1/1	PH2.00 FOUR ROW 180° H=1.5
A0	2012/04/18	NEW	-----	-----	X.XXX ±0.15	DATE	PROJ.		Customer NO.
				Angle ± 3°	APPROVE	DATE			
				DIM TOL					

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: salesks@wcon.com