
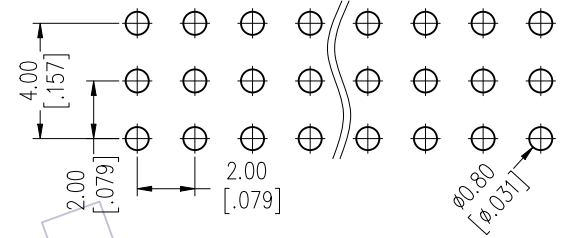


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

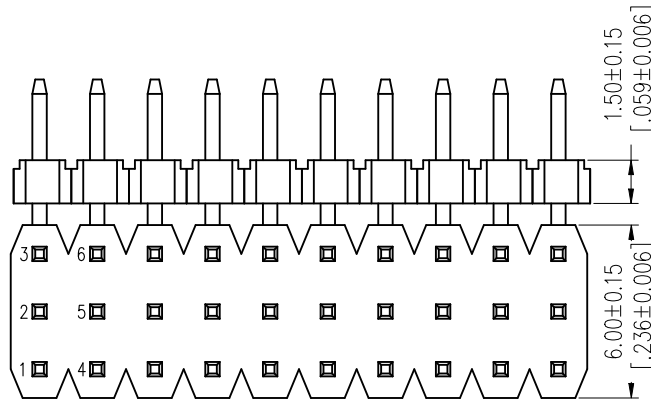

Ordering Information

1215-23 XX XX R XXX C 0 XX Δ

Δ No. of Pins Per Row: 03-40
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
 Pin Length(Short) L=A+B+D1+D2+3.2 Standard:
 Packing: 0=PE Bag, T=Tube
 Series No. 01-99
 Insulator Material C=PA9T

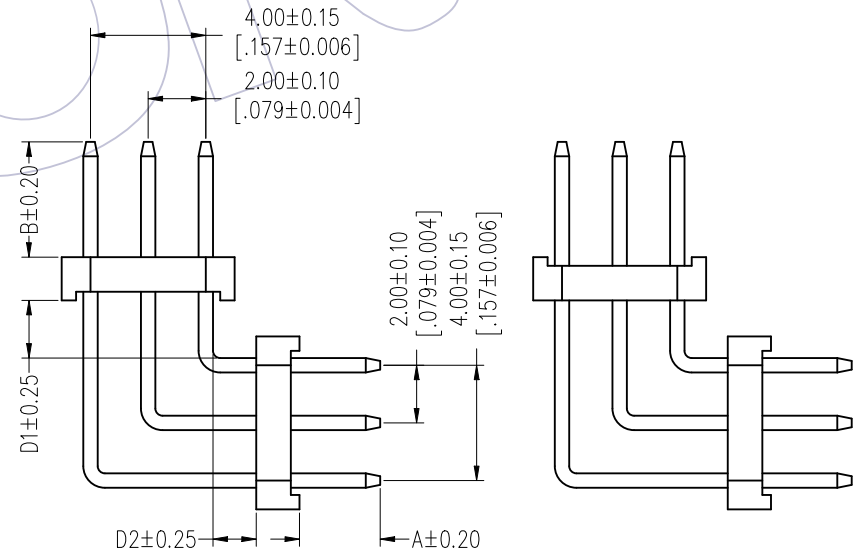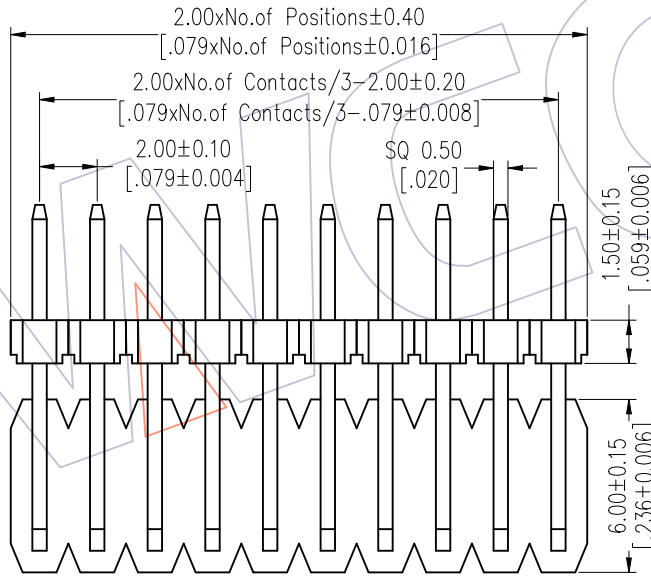

Item	Pin Length	A	D1	B	D2	Mating
Standard	---	2.80	---	4.00	---	2263
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 03~40P	Δ 3	Drawing	Drawing	2020/06/12	UNIT	mm	1215-23XXXXRXXXCOXX Δ
A2	2019/03/04	Modify	Δ 2	Ding	CHECK	DATE	SIZE	A4	TITLE: PH2.00 THREE ROW DOUBLE PLASTIC 90° H=1.5 MIDDLE BENDING
A1	2018/01/18	Modify P/N	Δ 1	-----	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2012/04/18	NEW	-----	Angle $\pm 3^\circ$			PROJ.		
				DIM	TOL				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com