
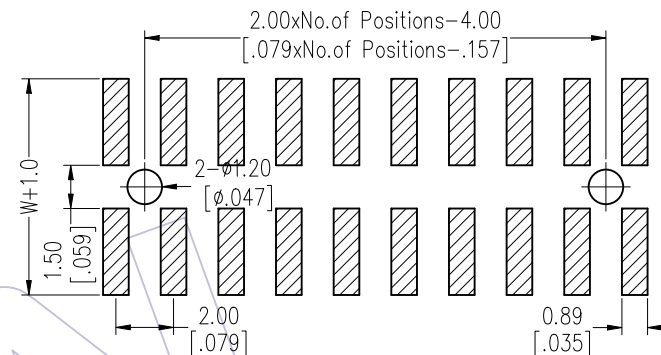


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

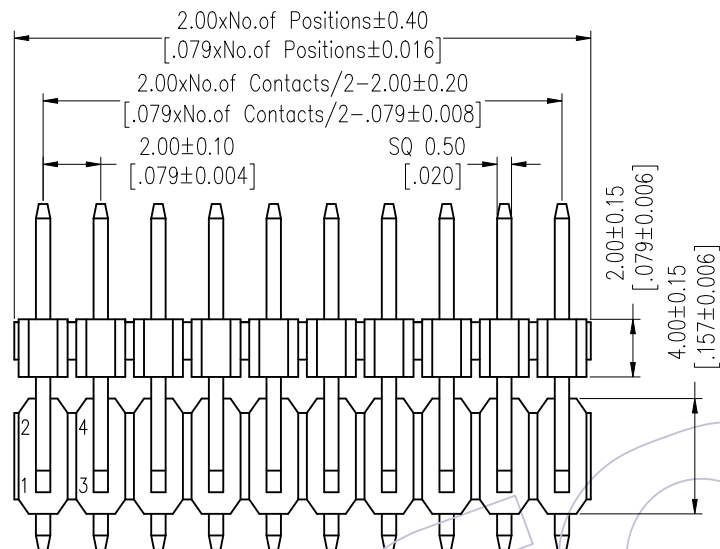

Ordering Information

1220-22 XX XX D XXX C T XX Δ

No. of Pins Per Row: 02-40
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
 Pin Length: $L = B1 + C - 3.0 + \frac{W-2.0}{2}$
 Standard:
 Packing: T=Tube, A=Tray
 Series No.: 01-99
 Insulator Material: C=PA9T

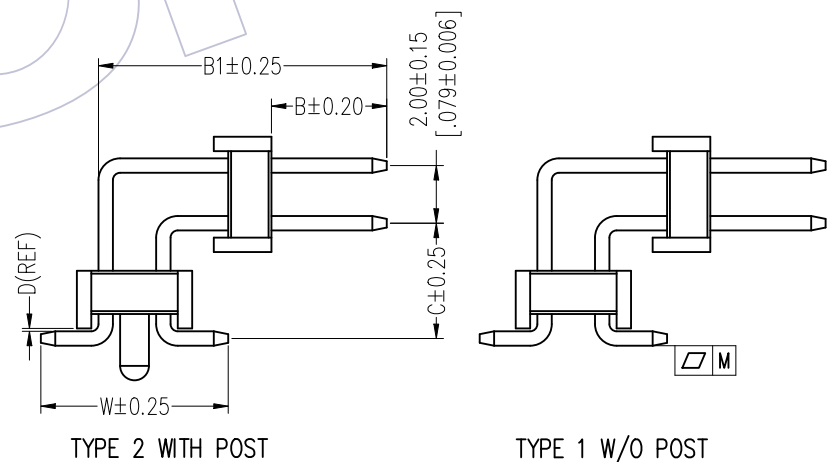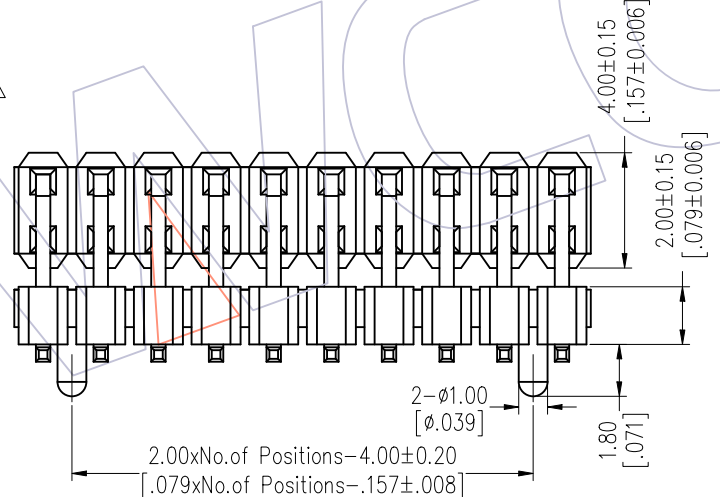

Item	Pin Length	W	D	B	B1	C	Mating
Standard	---	6.50	0.10	4.00	---	---	2240 2243 2263 2272
Alternate							

	PIN	2-15P	16-25P	26-40P
Δ	M	0.10	0.15	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/09/07	Modify	Δ	X.X	± 0.40	2018/09/07	UNIT	mm	1220-22XXXXDXXXCTXX Δ
A1	2018/01/19	Modify P/N	Δ	X.XX	± 0.25	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW DOUBLE PLASTIC 90° SMT H=2.0
A0	2012/04/26	NEW	-----	X.XXX	± 0.15	DATE	SHEET	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	$\pm 3^\circ$	DATE	PROJ.		
				DIM	TOL				

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com