
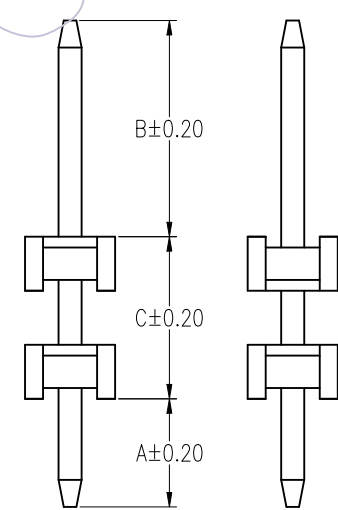
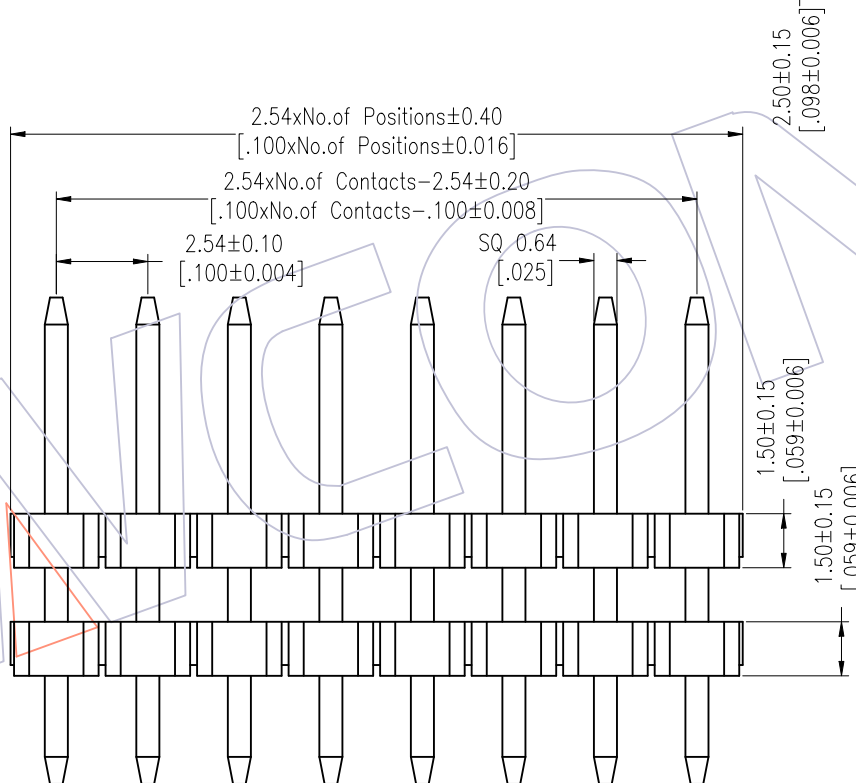



# HSF

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

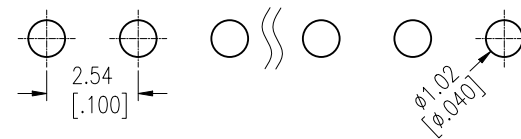

## Ordering Information

1115-21 XX XX S XXX C 0 XX  $\Delta$ 1

No. of Pins: 02~40  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin  
 Pin Length: L=A+B+C, Standard:  
 Insulator Material: C=PA9T  
 Packing: 0=PE Bag, T=Tube  
 Series No.: 01~99

Item	Pin Length	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.x ±0.40	Ruipeng	2018/01/22	UNIT mm		1115-21XXXXXXC0XX
x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE:
x.xxx ±0.15			SHEET 1/1		PH2.54 SINGLE ROW DOUBLE PLASTIC 180° H=1.5
Angle ± 3'	APPROVE	DATE	PROJ.		Customer NO.
DIM TOL					

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/22	Modify P/N	$\Delta$ 1
A0	2012/05/02	NEW	-----