

HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK




Ordering Information







1125-22 XX XX S XXX C 0 XX

No. of Pins Per Row: 02-40
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
 Pin Length L=A+B+C Standard:
 Insulator Material C=PA9T
 Packing 0=PE Bag T=Tube
 Series No. 01-99

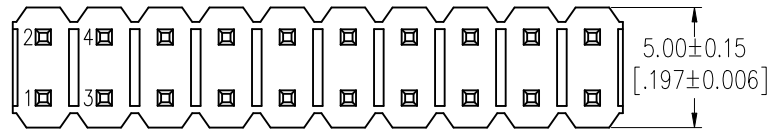

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

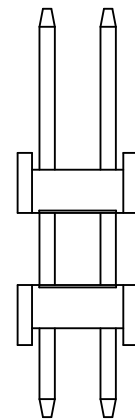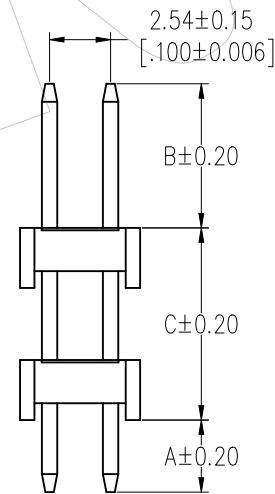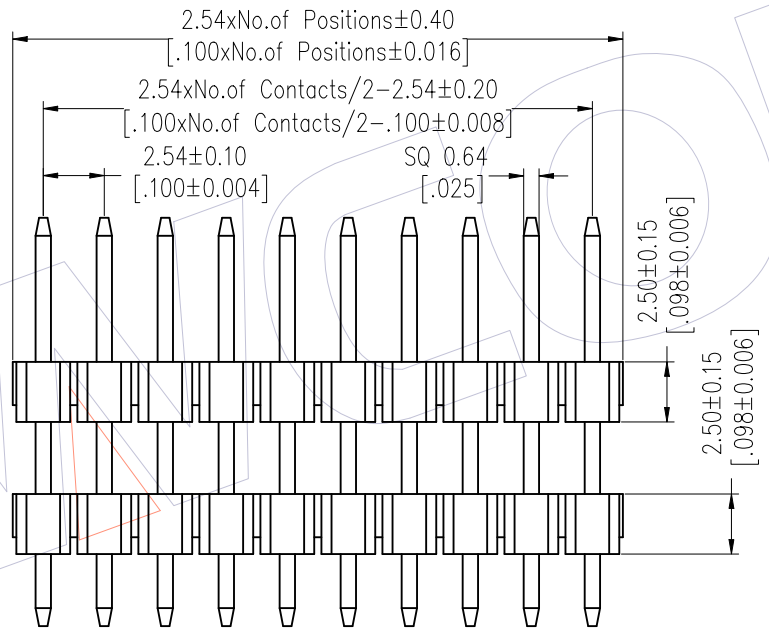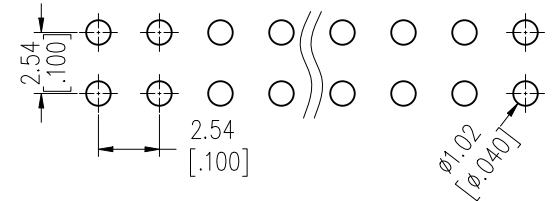

TYPE 1

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/06/02	Cancel PBT & Modify P/N		x.x ±0.40	XSR	2018/06/02	UNIT mm		1125-22XXXXXXC0XX
A1	2018/01/22	Modify P/N		x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 DUAL ROW DOUBLE PLASTIC 180° H=2.5
A0	2012/05/28	NEW	-----	x.xxx ±0.15		DATE	SHEET 1/1		Customer NO.
				Angle ± 3°	APPROVE	DATE	PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com