


HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +125°C(Au)

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+33%GF UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

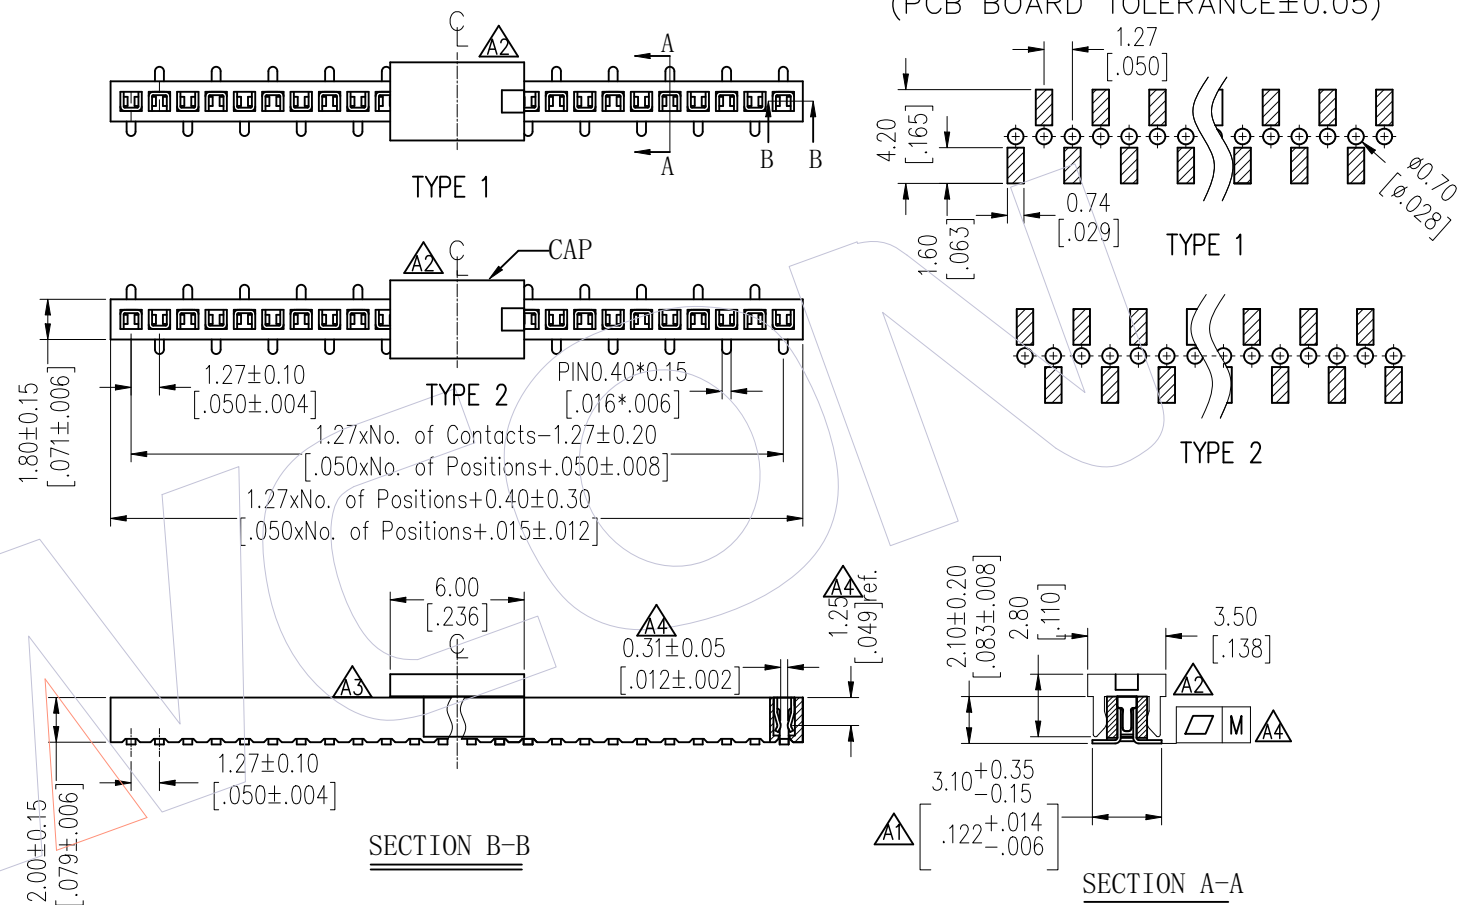

Ordering Information

2320T - 1 XX M XX CUN X X

A4 No. of Pins per ROW: 02-40PIN
G0 Contact Plating: Gold Flash
G3 10μ" Gold
G4 15μ" Gold
G5 30μ" Gold
T Tube
R Tape&Reel+CAP
P Tube+CAP
3 TYPE 1
4 TYPE 2
X Series No.

| Item | Pitch | Mating |
|-----------|-------|----------------|
| Standard | 1.27 | 1310/1315/1320 |
| Alternate | | |

| Pin(Per Row) | A4 | | | A5 | | | TITLE | PART NO. | SPEC. A4 |
|--------------|----|-------|--------|--------|------|------|--------|-------------------|-------------------|
| | M | 2-15P | 16-30P | 31-40P | 0.10 | 0.15 | 0.18 | TYPE 1 | 2320T-1XXMXXCUNX3 |
| | | | | | | | TYPE 2 | 2320T-1XXMXXCUNX4 | DUAL PINS |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--|--------|-------|-------|-----------|-------|------------|-------|-----|---------------------------------|
| A5 | 2023/02/03 | Modify Flatness | XSR | | | OPERATION | DRAW | 2023/02/03 | SCALE | FIT | SEE TABLE |
| A4 | 2020/06/24 | Add DIM.&Table;Modify 02~50PIN to 02~40PIN | XSR | x.x | ±0.40 | CHECK | DRAW | | UNIT | mm | TITLE: |
| A3 | 2017/04/14 | MODIFY CAP | XSR | x.xx | ±0.25 | | CHECK | | SIZE | A4 | 1.27mm Female Header Single Row |
| A0 | 2012/07/05 | NEW | ----- | x.xxx | ±0.15 | | CHECK | | SHEET | 1/1 | SMT H=2.0 Without Post |
| | | | | Angle | ± 3° | APPROVE | DATE | | PROJ. | | Customer NO. |

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com