
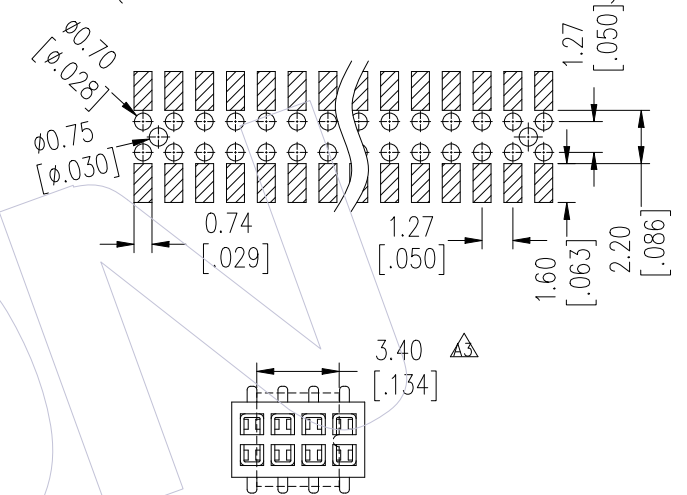


# HSF

NOTES:  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +125°C(Au)

Contact Material: Phosphor Bronze  
 Contact plating: Au over Ni  
 Insulator Material: PA9T+33%GF UL94V-0


Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

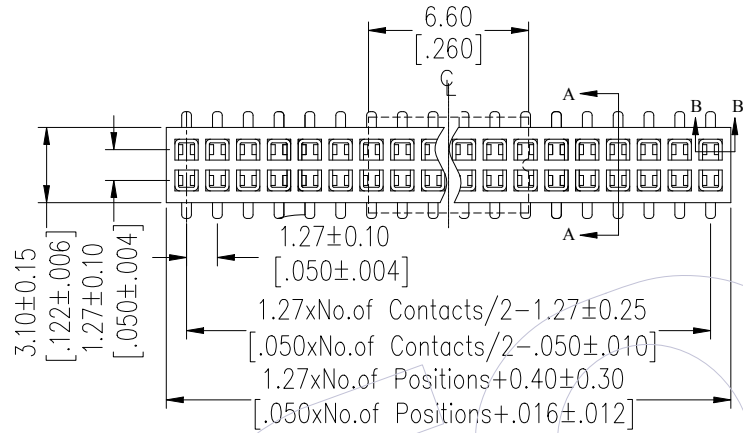


## Ordering Information

2320T - 2 XX M XX CUN X X

AA No. of Pins per ROW: 02~40PIN  
 Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold  
 Packing: T=Tube, R=Tape&Reel+CAP, P=Tube+CAP  
 Series No: 1=TYPE 1, 2=TYPE 2

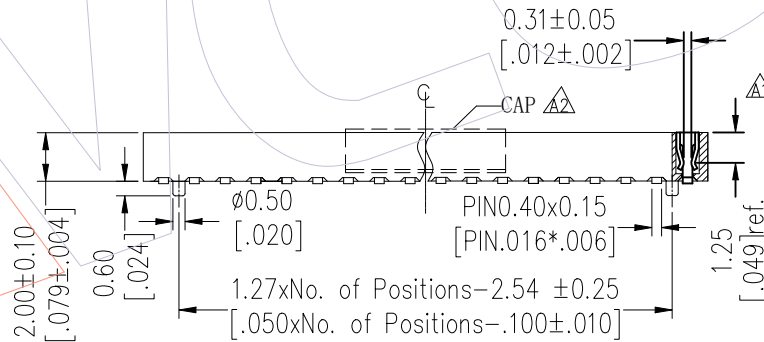

Special CAP for 2\*2P, 2\*3P, 2\*4P

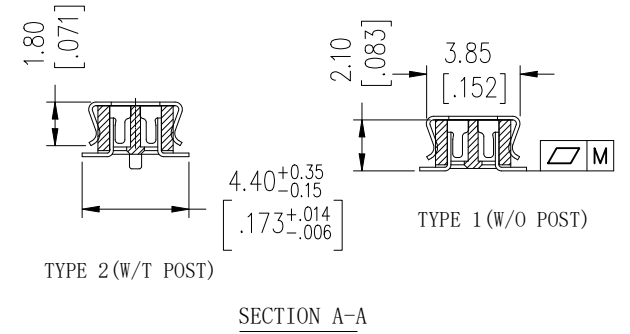

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

Pin(Per Row)	AA			A5	
	2-15P	16-30P	31-40P	TYPE	PART NO.
M	0.10	0.15	0.18	TYPE 1	2320T-2XXMXXCUNX1
				TYPE 2	2320T-2XXMXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.
A5	2023/02/03	Modify Flatness	XSR	OPERATION	DRAW	DATE	2023/02/03	SCALE	FIT	PART NO.
A4	2020/06/24	Add DIM.&Table; Modify 02~50PIN to 02~40PIN	XSR	x.X ±0.40	XSR	DATE		UNIT	mm	SEE TABLE
A3	2016/05/30	Modify CAP 3.00 → 3.40	XSR	x.XX ±0.25	CHECK	DATE		SIZE	A4	TITLE:
A0	2012/07/05	NEW	-----	x.XXX ±0.15	APPROVE	DATE		SHEET	1/1	1.27mm Female Header Dual Bottom
				Angle ± 3°				PROJ.		Enter SMT H=2.0
										Customer NO.

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com