




HSF

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)
 PCB BOARD THICKNESS:1.6~2.0

NOTES:
 Current Rating:10AMP
 Voltage Rating:300V
 Contact Resistance:10mΩ Max
 Withstand Voltage:2500V AC/minute
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40℃ to +120℃
 Wire Range:14-22AWG
 Screw Tightening Torsion:0.50N.m(5.1Kgf.cm).

Contact Material:Copper Alloy
 Contact plating:See Ordering Information
 Insulator Material:PBT,G.F,UL94V-0,Grey
 Platen Screw Material:Steel
 Platen Screw Plating:200u" Nickel.
 Nut Material:Steel
 Nut Plating:120u" Nickel.
 Screw(Long&Short) Material:Steel
 Screw(Long&Short) Plating:400u" Black Dacromet.
 Plain Washer Material:Steel
 Plain Washer Plating:80u" Nickel.
 Split Washer Material:Steel
 Split Washer Plating:80u" Nickel.

Recommended Process:
 Wave Soldering,Peak temperature:235±5℃

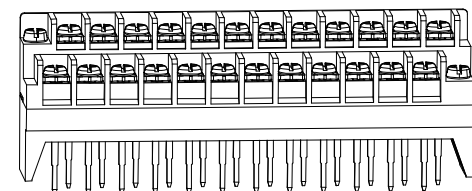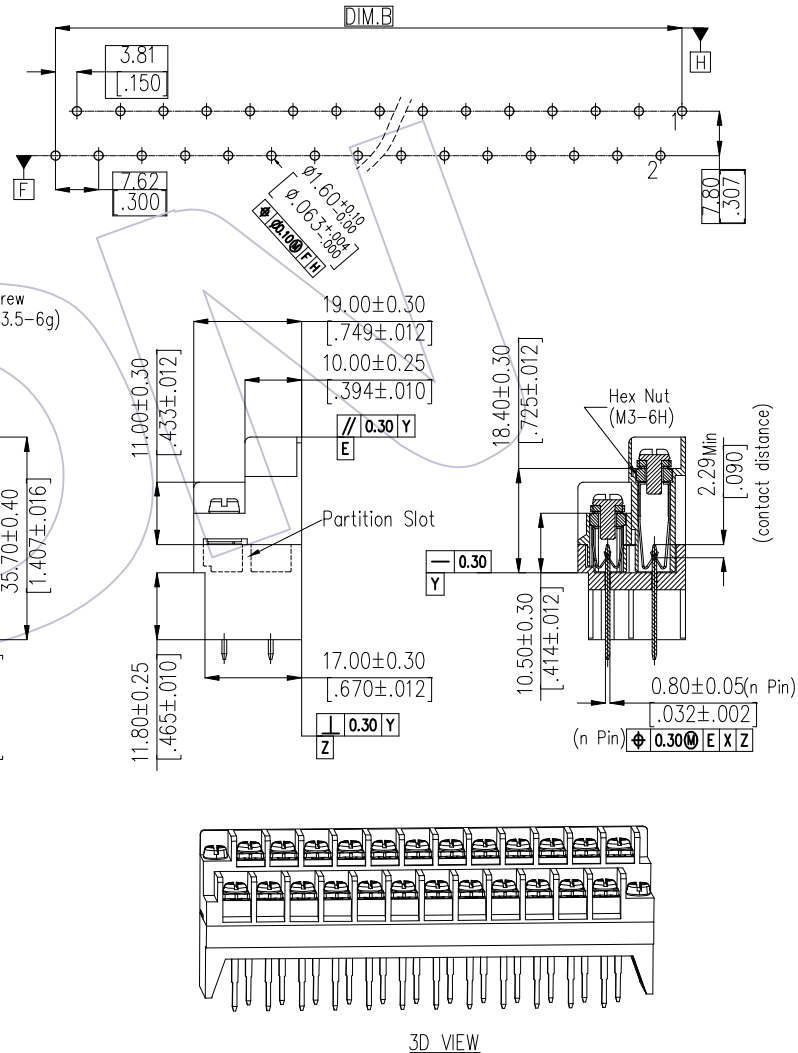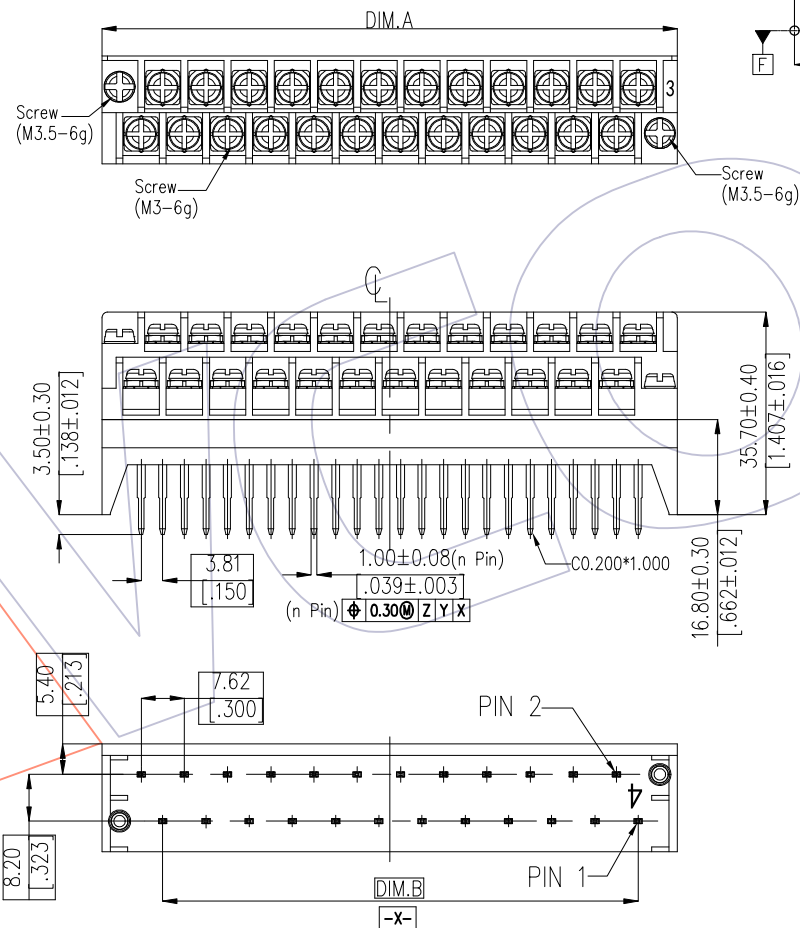

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
				X.XX	±0.25	ZXC	2020/11/23	UNIT	mm [inch]	BH762-04-XX-T-XX-S02
				X.XXX	±0.15	CHECK	DATE	SIZE	A4	TITLE: 7.62*8.20mm,Double-Row, W19.0mm*H35.7mm,With Partition Slot Barrier Terminal Blocks
AO	2020/11/23	NEW RELEASE	ZXC	Angle	± 3'	APPROVE	DATE	SHEET	1/2	Customer NO.
				DIM	TOL			PROJ.	∅	

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com