

HSF





NOTES:
 Current Rating:1A AMP
 Contact Resistance:30milliohm Max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C to +105°C

Housing Material:PA9T+30%GF(UL94V-0)
 Contact Material:Copper alloy
 Contact plating:Au or Sn over Ni Plating

Ordering Information

3135-XX R XX B K00 X 3


No. of Pins	Contact Plating	Color Insulator	Packing
4 6 8	G0=Gold Flash	B=Black	A=Type
10 34	G3=10u"Gold	U=Blue	T=Tube
14 40	G4=15u"Gold	W=White	
16 44	G5=30u"Gold		
20 50	S0=Gold Flash/Tin		
24 60	S3=10u"Gold/Tin		
26 64	S4=15u"Gold/Tin		
30 80	S5=30u"Gold/Tin		
32 100	SN=Tin		

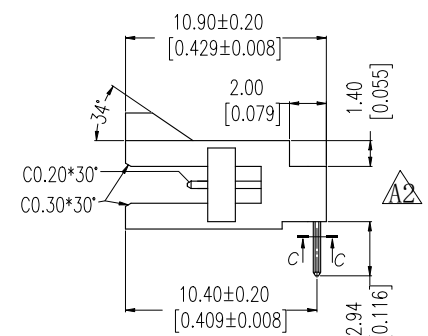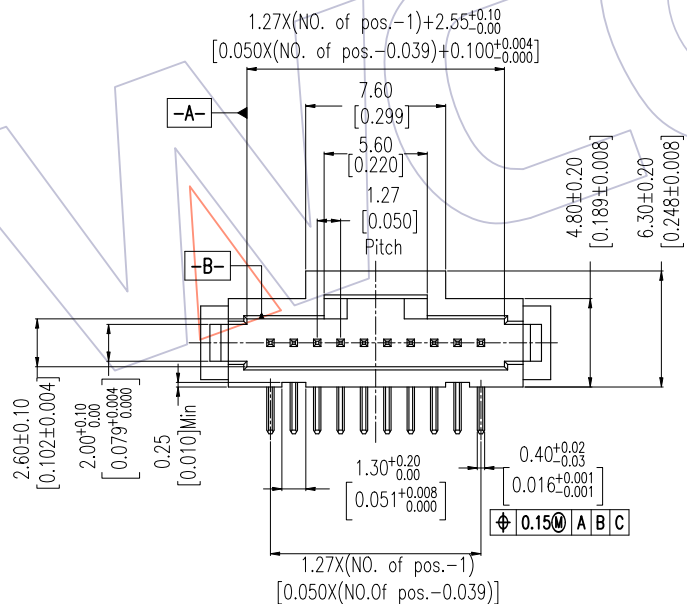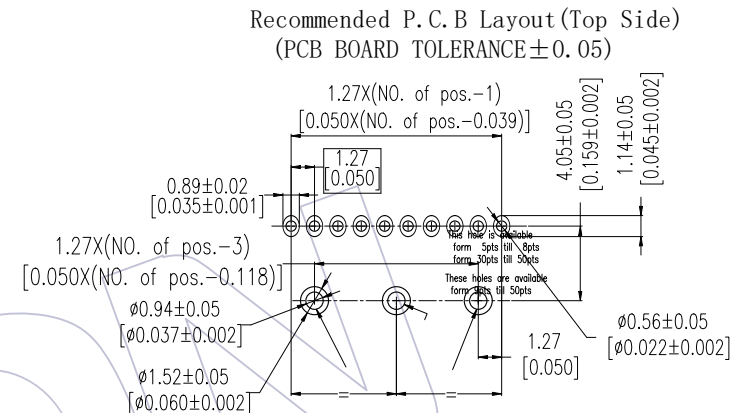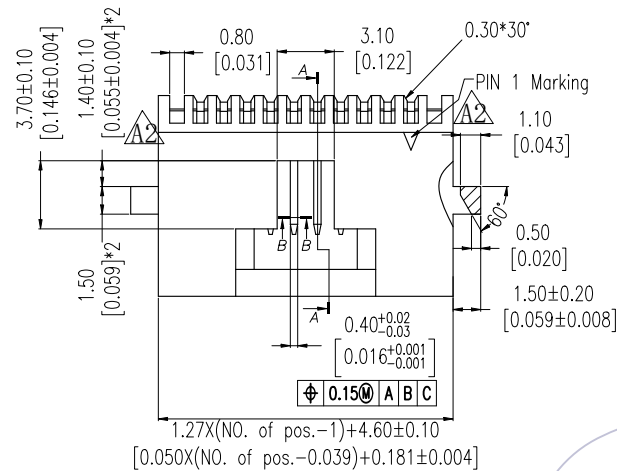

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2016/01/15	Modify	A2	X.X ±0.40	JYHuang	2016/01/15	UNIT mm		3135-XXRXXBK00X3
A1	2015/01/20	Modify	A1	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.27mm Box 90° DIP (Without fixing)
A0	2013/08/27	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET 1/2		Customer NO.
				Angle ± 3°			PROJ.		

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

HSF

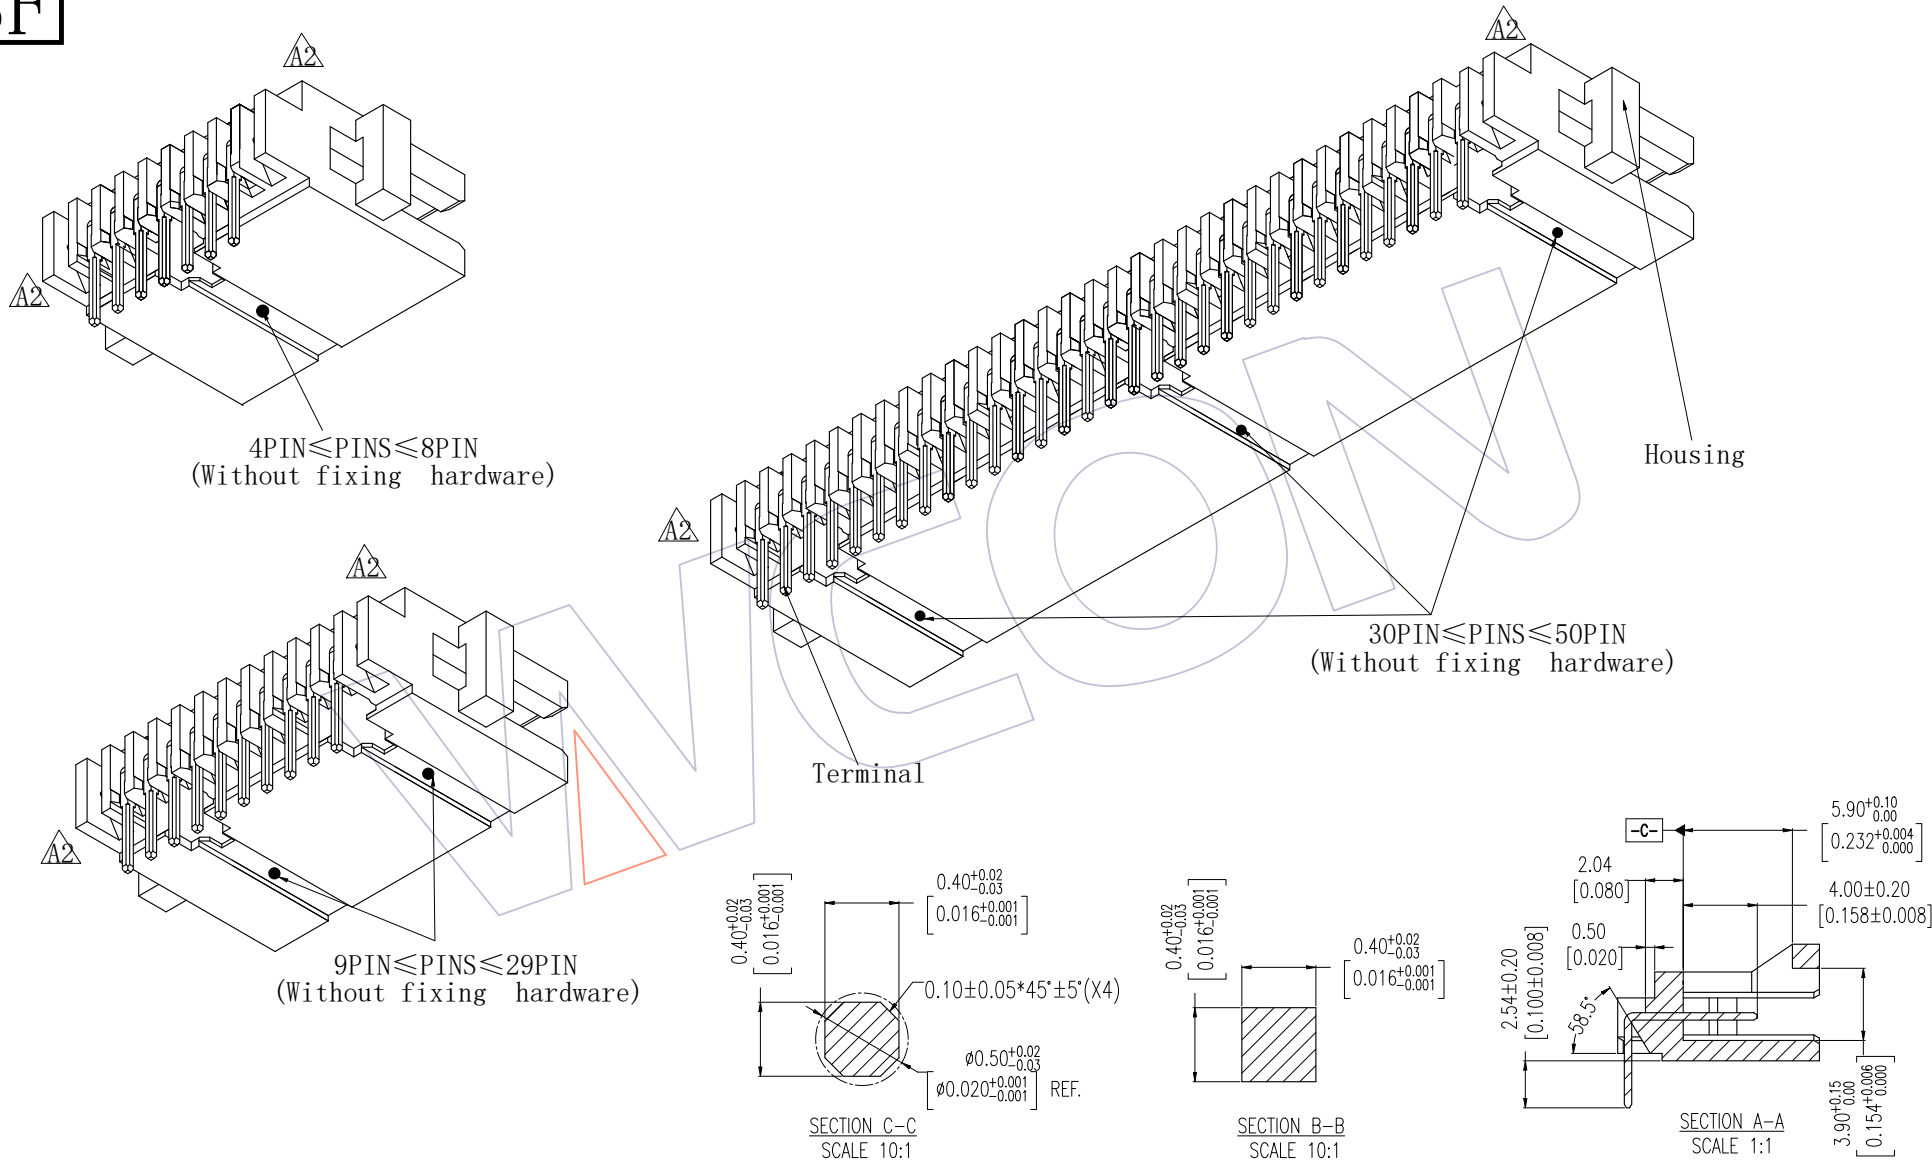

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2016/01/15	Modify	A2	X.X ±0.40	JYHuang	2015/01/20	mm		3135-XXRXXBK00X3
A1	2015/01/20	Modify	A1	X.XX ±0.25	CHECK	DATE	inch		TITLE: 1.27mm Box 90° DIP (Without fixing)
A0	2013/08/27	NEW		X.XXX ±0.15	APPROVE	DATE	A4		Customer NO.
				Angle ± 3°			SHEET 2/2		
				DIM TOL			PROJ.		

WCON
Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--