


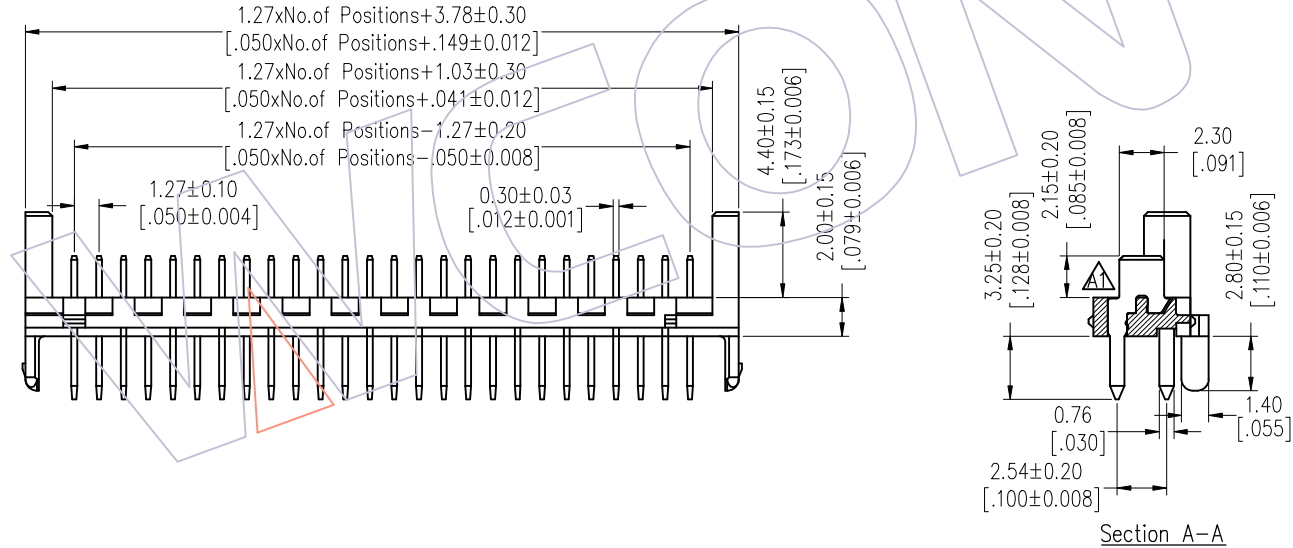
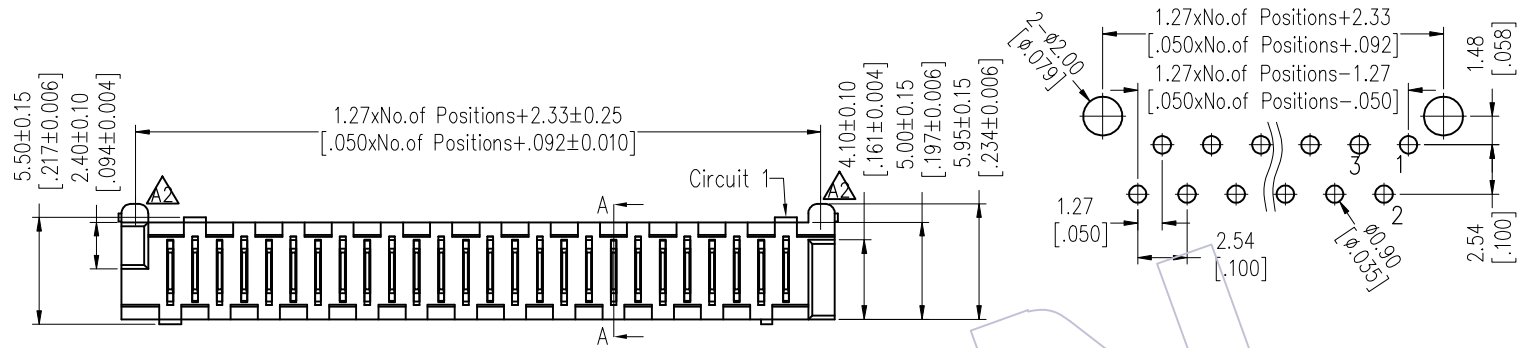
HSF

NOTES:

Current Rating: 1.0AMP 
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0






Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)



Ordering Information

3901-XX MS XX D W B X 1

| No.of Pins | Contact Plating | Insulator | Color | Packing |
|------------|-----------------|-----------|---------|---------|
| 04 16 | SM=Matte Tin | D=LCP | B=Black | T=Tube |
| 06 18 | SN=Tin | | | |
| 08 20 | | | | |
| 10 22 | | | | |
| 12 24 | | | | |
| 14 26 | | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | APPROVE | DATE | PROJ. | SHEET | SCALE | FIT | PART NO. | TITLE: | Customer NO. |
|-----|------------|--|---|-------|-------|-----------|------------|-------|-------|-------|---|------------------|---|--------------|
| A3 | 2018/05/15 | Picoflex Connector--1.27mm SPC Connector |  | | | OPERATION | DATE | | | | | 3901-XXMSXXDWBX1 |  | |
| A2 | 2013/12/26 | Modify the drawing |  | x.x | ±0.40 | DING | 2018/05/15 | | | UNIT | mm | | | |
| A1 | 2013/08/16 | Modify the drawing |  | x.xx | ±0.25 | CHECK | | | | SIZE | A4 | | | |
| A0 | 2012/11/01 | NEW | ----- | x.xxx | ±0.15 | | | | | SHEET | 1/1 | | | |
| | | | | Angle | ± 3° | APPROVE | | | | PROJ. |  | | | |



Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com |
|---|--|